


Click STRIPES

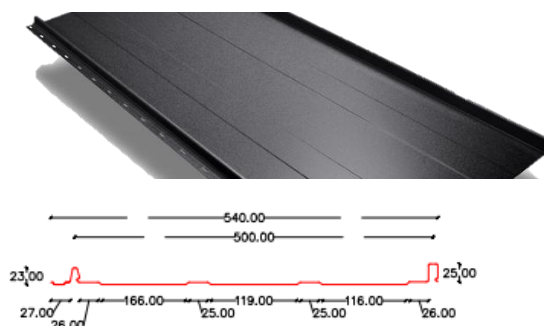

Bel Profile CLICK – Panou de tabla prefaltuit.

Cod Produs: **BPLCLK050**

**Domeniu de utilizare**

- ✓ Acoperisuri
- ✓ Fatade

**Caracteristicis:**

- ✓ Usor de instalat
- ✓ Set de scule minim necesar instalarii
- ✓ Usor de manipulat si transportat

**Standarde Europene:**

EN 14782:2006 si EN 508-1:2000

**Comportament la foc:**

Reactie la foc: Clas A1

Reactie la foc exterior: Class Broof (t1), Broof (t2), Broof (t3), Broof (t4)

Materie prima	Otel galvanizat prevopsit
Tip otel	DX51D
Grosime	0.50 mm
Protectie anticoroziva g/m <sup>2</sup>	225-275 Zn
Latime (totala)	540 mm
Latime (utila)	500 mm
Adancime profil	3 mm
Distanta de sipcure	200 mm
Panta minima	8-10°
Lungimea panourilor	1.5 – 5 m

<i>Finisaj</i>	SunClear
<i>Greutate</i>	4.00 kg / m <sup>2</sup>
<i>Strat de Zinc</i>	275 g/m <sup>2</sup>
<i>Tip de vopsea</i>	Polyester L 35 μm
<i>Culori RAL</i>	3005, 3009, 7016, 8017, 9002, 9005, 9006
<i>Garantie tehnica</i>	20 ani
<i>Garantie estetica</i>	10 ani
<i>Durata de viata</i>	80 ani

Lista accesoriilor:

	Sort de jgheab		Cornier calcan
	Corner de margine		Fronton tip coama / Semicoama
	Coama dreapta		Profil de imbinare plat
	Dolie		Profil de imbinare inalt
	Dolie de perete / record lateral		Suruburi fixe panouri Click 4.2 x 25 mm